

*"An unrivalled appliance to solve grease related problem"*

Environmental  
Products & Services Ltd.

[www.EPAS-Ltd.com](http://www.EPAS-Ltd.com)

# GreaseShield™

AST (Automatic Solids Transfer) Range

Automatic Grease Separation  
and Solids Removal

*GreaseShield™ is the most cost effective greasetrap in the world combining Best Available Technology (BAT) with value for money.*

*"Probably the best Greasetrap in the world"*



Easy lift  
FOG container

Dewatered,  
grease laden  
solids container

Without a licence you cannot operate

## TRADE EFFLUENT LICENSING

**Massive savings!**

No periodic pumping required!  
No enzymes or chemicals required!  
No heating element energy costs!

### Key Benefits

- ✓ Fully Automatic.
- ✓ Protects drains and public hygiene by efficiently removing Fats, Oils and Greases, (FOGs), whilst removing, dewatering and transferring solid contaminants for recycling.
- ✓ Incorporates internal cleaning - the only self-cleaning greasetrap in the World.
- ✓ User friendly! No need for staff to access the inside of the greasetrap.
- ✓ Reduces CO<sub>2</sub> emissions - low carbon footprint.

5 Shepherd's Drive  
Carnbane Industrial Estate  
Newry, Co. Down  
N. Ireland, BT35 6JQ

Tel: +44 (0) 28 3083 3081

Fax: +44 (0) 28 3025 7556

**From ROI**

Tel: (048) 3083 3081

Fax: (048) 3025 7556


Web: [www.EPAS-Ltd.com](http://www.EPAS-Ltd.com)

Award Winning Technology





[www.EPAS-Ltd.com](http://www.EPAS-Ltd.com)

# Installation Requirements Of Greaseshield Units

**GreaseShield Combi 32-50**

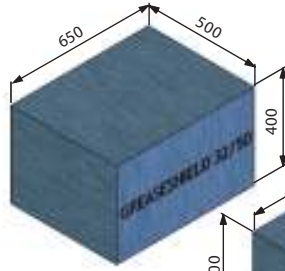

**GreaseShield ETU 32/40-50**

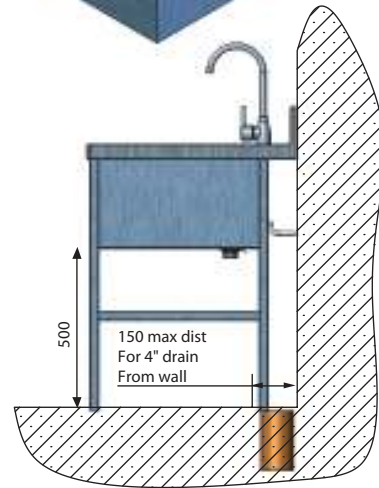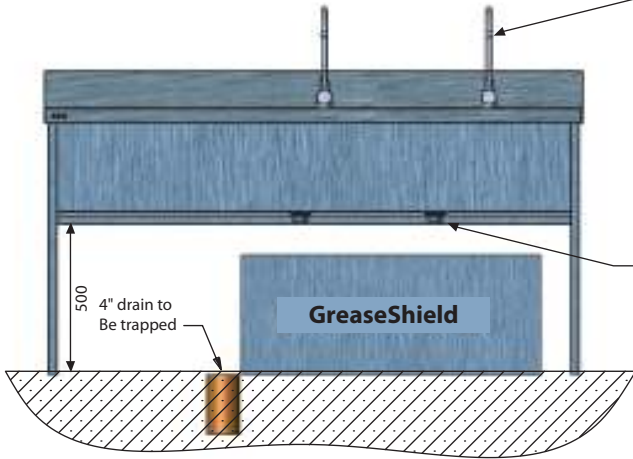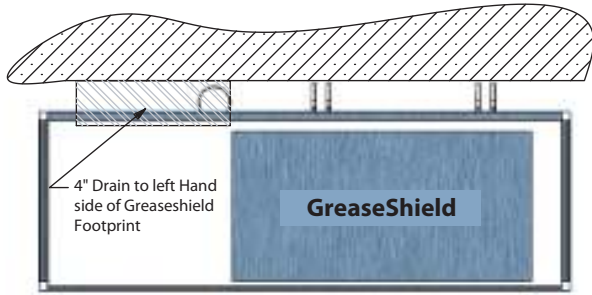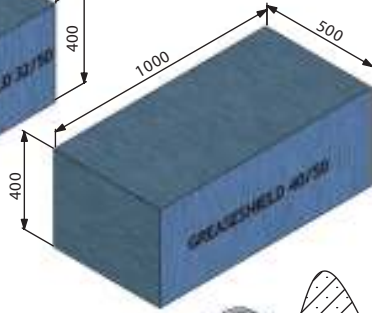

1 x inline valve  
Item no. WMT15X 15X 3/4" BSP  
On water supply  
To accept 3/4" bsp hose



1p56 electrical socket  
Item no. 1308P01  
Item no. 1308P02  
Requirements for  
Greaseshield installation



## Stainless steel Furniture requirements For greaseshield installation

