

Technical Specification - CombiPump to GS1850-PF



**PRE-FILTER
FOR SOLID WASTE
SEPARATION**

GreaseShield®
The Grease Management Solution

APPLICATIONS

- 6 to 20 Grid Convection Ovens
- Steam Combi Ovens
- Rotisserie Ovens

FLOW RATES & CERTIFICATION

- CombiPump Maximum Flow Rate - 2.0 L/sec (Depending on lift height and distance)
- GS1850 Pro-Active Flow Rate - 1.85 L/sec
- ASME Certification
- CSA Certification
- EN 1825 Certification

STANDARD FEATURES & FUNCTIONS

CombiPump

- Automatic Float Switch Activation.
- Low-Level Inlet Position, makes it compatible with most Commercial Ovens.
- Flexible Outlet hose and FlexiPlumb fittings provided for ease of installation.
- Transfers contaminated Effluent directly to the GreaseShield®.

GS1850

- Automatic FOG & solids removal
- Self cleaning
- Magnetic baffle for bioremediation
- PLC controlled
- Non restricted Vortex Flow Control device
- Reverse flow configuration
- Space Saver Running Trap & Sampling Point
- Globally certified award winning technology
- The only Green Certified grease trap in the world

Plumbing Connections

CombiPump Inlets	2"/50mm
CombiPump Outlet	1¼"/32mm
CombiPump Overflow	2"/50mm
PreFilter Inlet	1½"/40mm
GS1850 Outlet	2"/50mm
GS1850 Decant Outlet	¾"/18mm
Hot Water Solenoid	¾"/22mm

Electrical Ratings

	USA	UK,EU,AU,NZ
Voltage	110-120v	230v
CombiPump Current	3.6A	1.3A
GS1850 Frequency	60Hz	50Hz
GS1850 Current	0.98A	0.49A

Standard Operational Times

Days of Operation	7 Days a Week
Hours of Operation	07:00-02:30

Note: Operational times should be adjusted to suit the needs of the kitchen

Average Power Consumption

GS1850	15.8W Per Hour
--------	----------------

GREASESHIELD® CERTIFICATIONS & APPROVALS

- Global GreenTag LCA Rate Gold Certification
- ASME A112.14.3 & A112.14.4 (American Society of Mechanical Engineers)
- NSF International (National Sanitation Foundation)
- CSA (Canadian Standards Association) - Grease Interceptors
- UL (Underwriters Laboratory)
- IAPMO (International Association of Plumbing and Mechanical Officials) Uniform Plumbing Code Certification Mark
- UKCA (UK Conformity Assessed)
- CE - Conformity with Health, Safety and Environmental Protection \ Standards with the European Economic Area (EEA)
- EN1825 (European Standard for Grease Separators)
- KIWA (ETA DK, Swedac & SINTEF) - Sweden, Norway and Finland. European Institution for Testing, Inspection and Certification
- SHASE-S 217:2016 (Japanese Grease Management Standard for Grease Interceptors)



**Environmental
Products and Services Ltd**

Award Winning Technology

www.GreaseShield.com

HEAD OFFICE +44 (0) 28 3083 3081

sales@epas-ltd.com





GB OFFICE +44 (0) 161 477 5555

V7 10/12/2024

Technical Specification - CombiPump to GS1850-PF

CombiPump

Waste Water Solutions

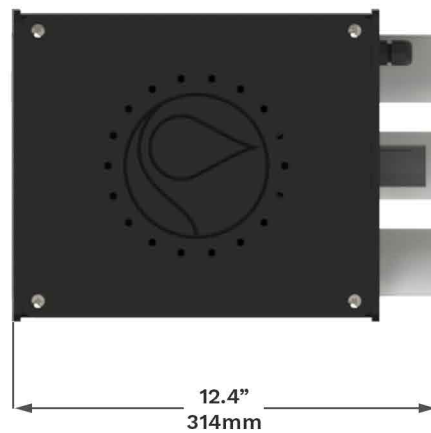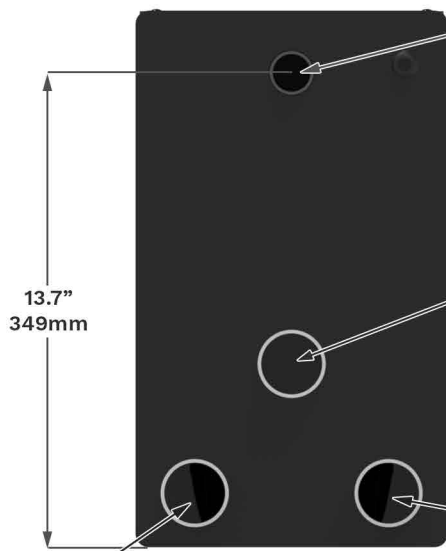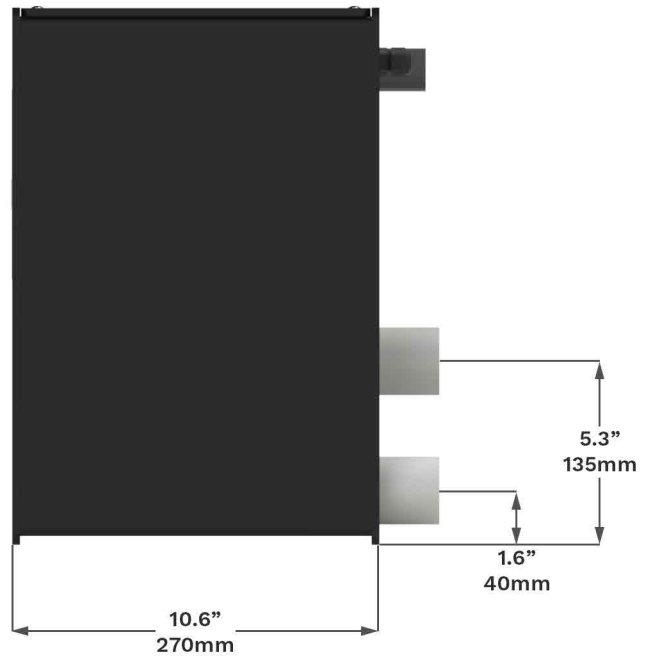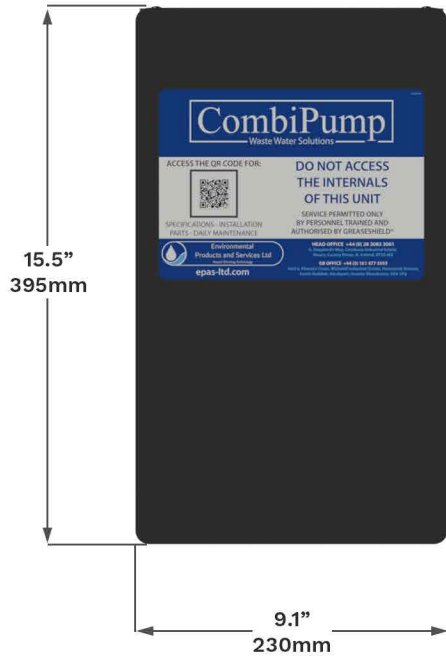

Environmental
Products and Services Ltd

Award Winning Technology

V7 10/12/2024


HEAD OFFICE +44 (0) 28 3083 3081

www.epas-ltd.com

sales@epas-ltd.com


GB OFFICE +44 (0) 161 477 5555

Technical Specification - CombiPump to GS1850-PF

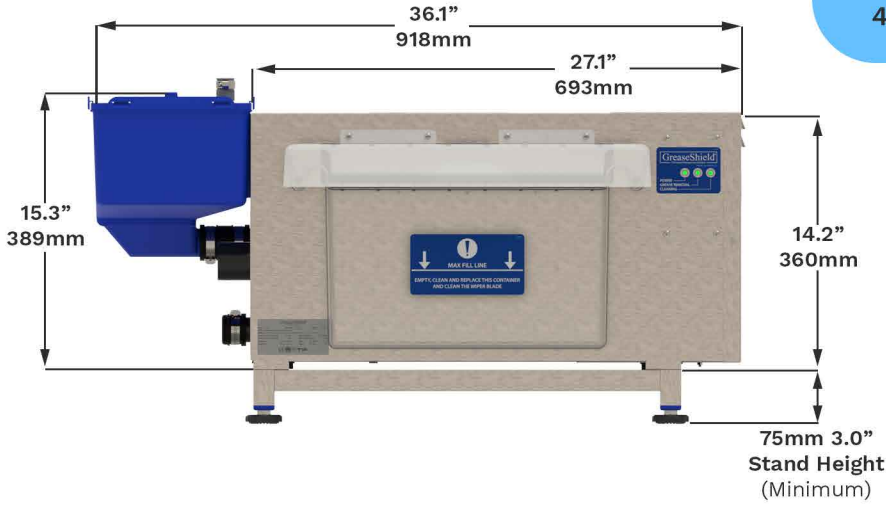

**PRE-FILTER
INLET Ø
1 ½"
41mm**

**OUTLET Ø
2"
54mm**

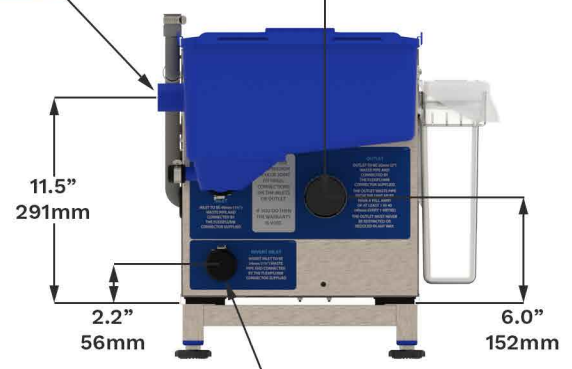

**INVERT
INLET Ø
1 ¼"
34mm**




**DECANT
OUTLET Ø
¾"
18mm**



**HEIGHT REQUIRED
FOR FILTER BASKET
REMOVAL**

**SPACE REQUIRED
FOR LID REMOVAL
AND ACCESS**

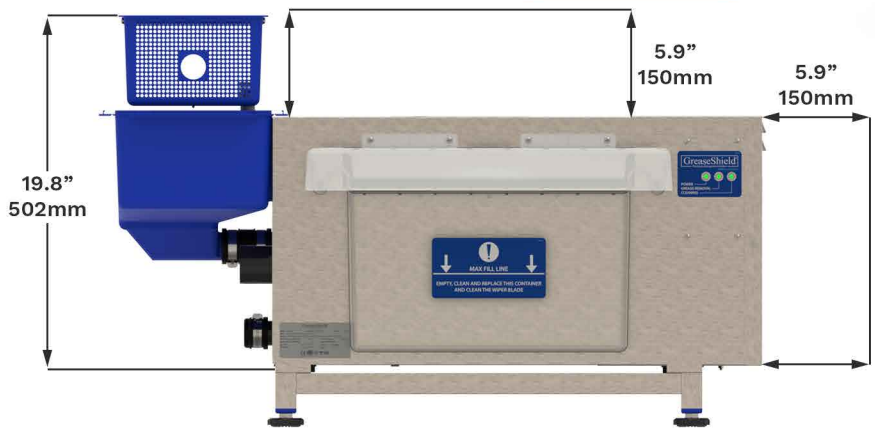

**SPACE REQUIRED
FOR END PLATE
REMOVAL AND
ACCESS**



**Environmental
Products and Services Ltd**
Award Winning Technology

V7 10/12/2024

www.GreaseShield.com

HEAD OFFICE +44 (0) 28 3083 3081

sales@epas-ltd.com

GB OFFICE +44 (0) 161 477 5555