



Technical Specification - GreaseShield® 3000-DW

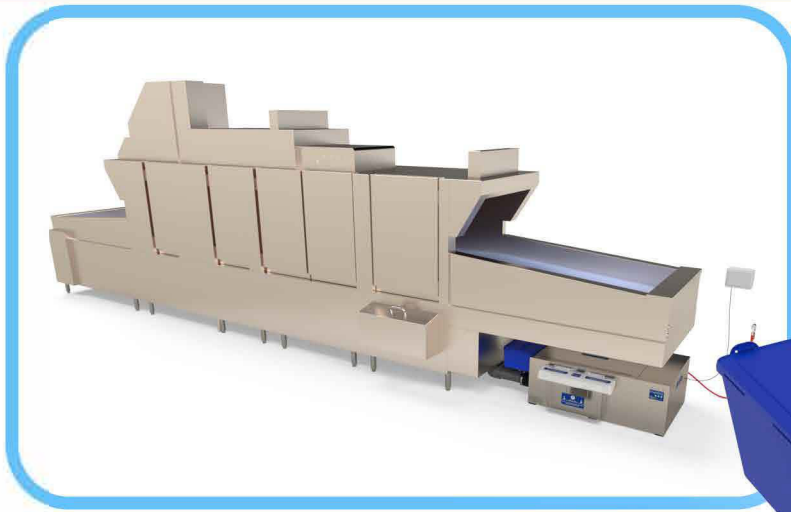

**PRE-FILTER
FOR SOLID WASTE
SEPARATION**

GreaseShield®

The Grease Management Solution

APPLICATIONS

- Conveyor/Tunnel Dishwashers
- Pot-Wash & Pre-Rinse Sinks

FLOW RATES & CERTIFICATION

- Pro-Active Flow Rate - 3 L/sec
- ASME Certification
- PDI Certification
- CSA Certification
- EN 1825 Certification

STANDARD FEATURES & FUNCTIONS

- Automatic FOG & solids removal
- Self cleaning
- Magnetic baffle for bioremediation
- PLC controlled
- Reverse flow configuration
- Grey water recirculation
- Globally certified award winning technology

Plumbing Connections

Inlet	2"/54mm
Outlet	3"/76mm
Hot Water Solenoid	¾"/22mm

Electrical Ratings

	USA	UK,EU,AU,NZ
Voltage	120v	230v
Frequency	60Hz	50Hz
Current	0.98A	0.49A

Standard Operational Times

Days of Operation	7 Days a Week
Hours of Operation	07:00-02:30

Note: Operational times should be adjusted to suit the needs of the kitchen

Average Power Consumption

15.8W Per Hour

CERTIFICATIONS & APPROVALS

- PDI G101 (Plumbing & Drainage Institute)
- ASME A112.14.3 & A112.14.4 (American Society of Mechanical Engineers)
- NSF International (National Sanitation Foundation)
- CSA (Canadian Standards Association) - Grease Interceptors
- UL (Underwriters Laboratory)
- IAPMO (International Association of Plumbing and Mechanical Officials) Uniform Plumbing Code Certification Mark
- UKCA (UK Conformity Assessed)
- CE - Conformity with Health, Safety and Environmental Protection \ Standards with the European Economic Area (EEA)
- EN1825 (European Standard for Grease Separators)
- KIWA (ETA DK, Swedac & SINTEF) - Sweden, Norway and Finland. European Institution for Testing, Inspection and Certification
- SHASE-S 217:2016 (Japanese Grease Management Standard for Grease Interceptors)



**Environmental
Products and Services Ltd**

Award Winning Technology

V10 09/09/2024


www.GreaseShield.com

HEAD OFFICE +44 (0) 28 3083 3081

sales@epas-ltd.com


GB OFFICE +44 (0) 161 477 5555

Technical Specification - GreaseShield® 3000-DW

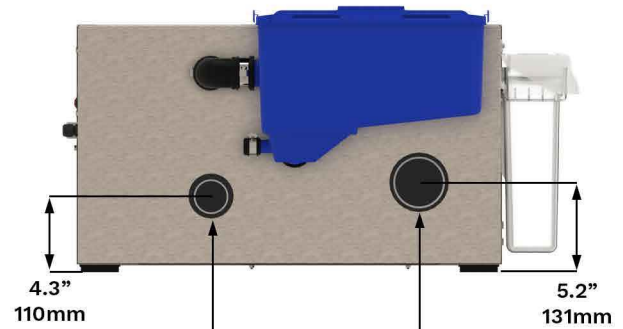

INLET Ø
2"
54mm

OUTLET Ø
3"
76mm

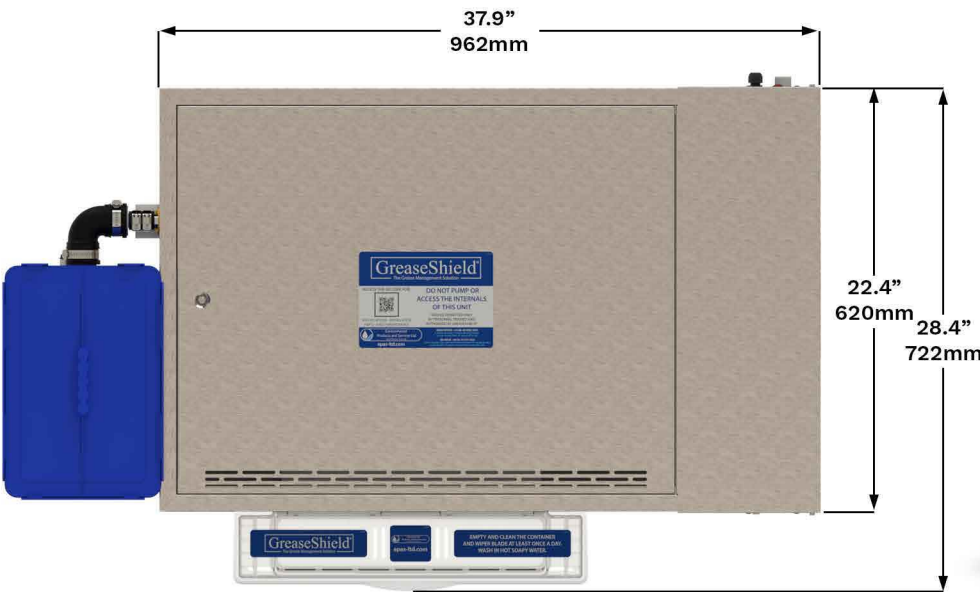

HEIGHT REQUIRED FOR FILTER BASKET REMOVAL



SPACE REQUIRED FOR END PLATE REMOVAL AND ACCESS



Environmental Products and Services Ltd

Award Winning Technology

www.GreaseShield.com

HEAD OFFICE +44 (0) 28 3083 3081

sales@epas-ltd.com

GB OFFICE +44 (0) 161 477 5555

V10 09/09/2024